

Fig. 1

Authentication Server

Gateway

Client

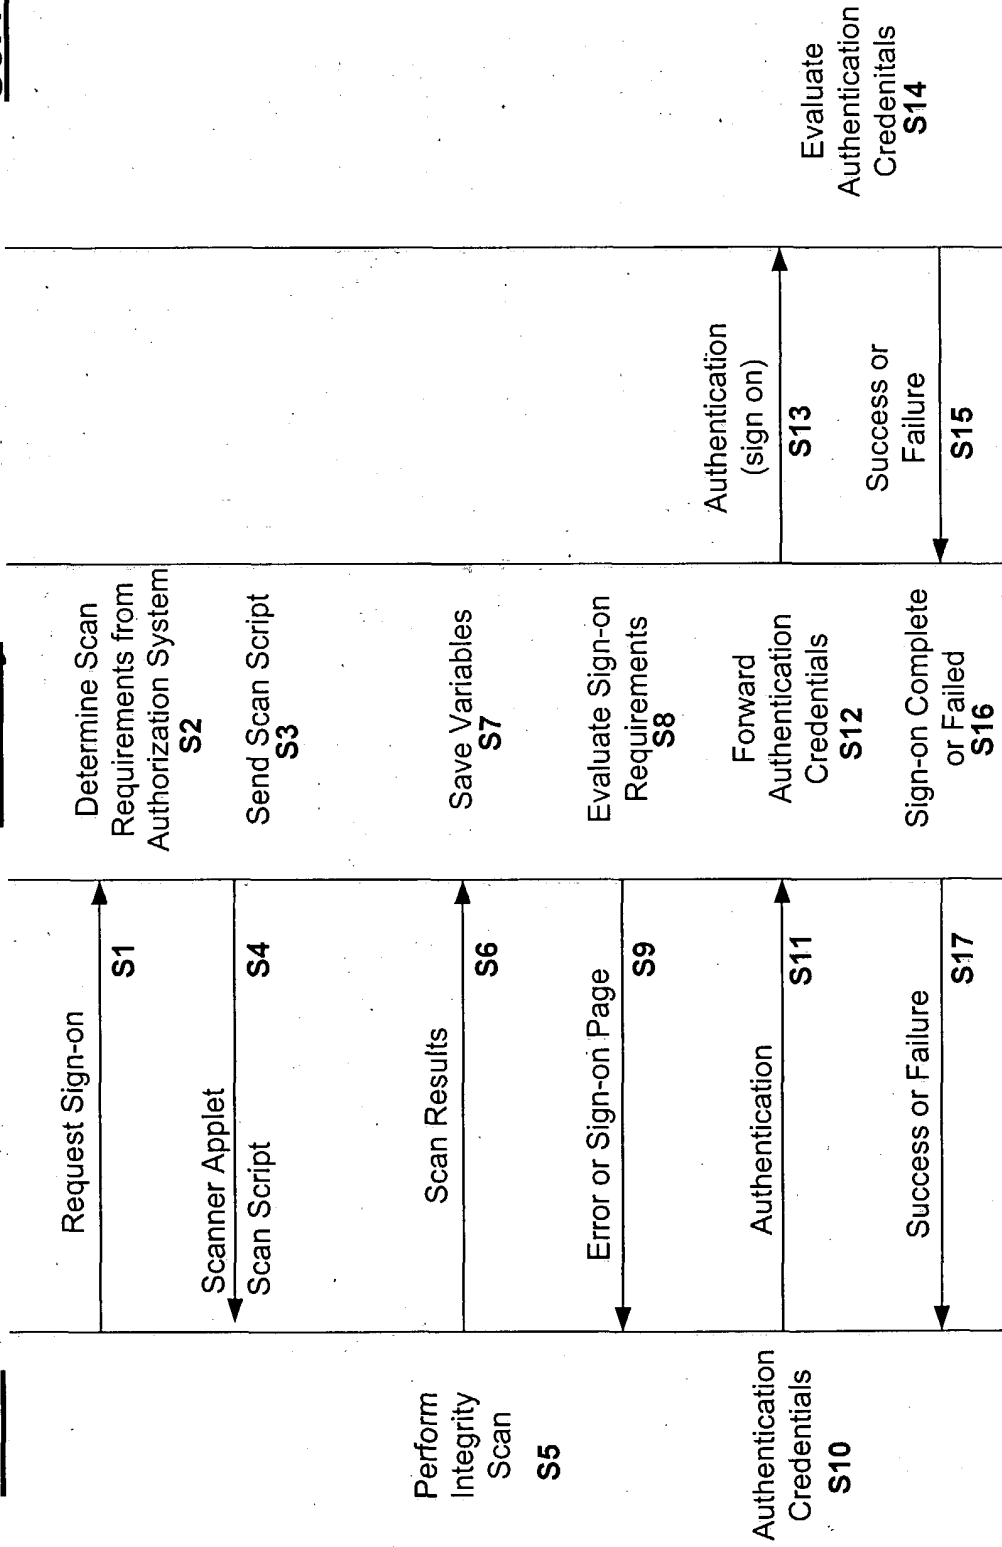


Fig. 2

Variables

Logout

Help

12

13

17

14

16

15

18

Variables:

New

18

Variable Name	Description	Delete
Username	Username of the remote user	<input type="checkbox"/>
User_group	The set of groups to which this user belongs	<input type="checkbox"/>
Access_mode	"Read" or "Write" (for file resources only)	<input type="checkbox"/>
Client_IP	The IP address of the remote user	<input type="checkbox"/>
Interface_IP	The IP address of the interface that accepted client connection	<input type="checkbox"/>
Time_of_day	The time of day, e.g., "09:04am"	<input type="checkbox"/>
Auth_Method	The authentication method in effect for the user session	<input type="checkbox"/>
Browser_User_Agent	The user-agent HTTP string from the remote user's browser	<input type="checkbox"/>
Dest_URL	The full URL from the back-end request	<input type="checkbox"/>
SSL_Strength	"40-bit", "56-bit", "128-bit" or "168-bit"	<input type="checkbox"/>
Day_Of_Week	The day of week: "Monday", ... "Sunday"	<input type="checkbox"/>
Resource_Name	The name of the requested resource	<input type="checkbox"/>
My_Integrity_Level	Result of scan: "high", "med", "low"	<input type="checkbox"/>
Norton_Exists	"true" if Norton Antivirus found on client	<input type="checkbox"/>

Save Settings

Fig. 3

Variables Definition

Logou t Help

**SAMPLE TAB BODY LAYOUT FOR VARIABLES**

Variables Name: NORTON\_EXISTS

Description: "true" if Norton Antivirus found on client

Default Value: false

Save Settings

20

21

Fig. 4

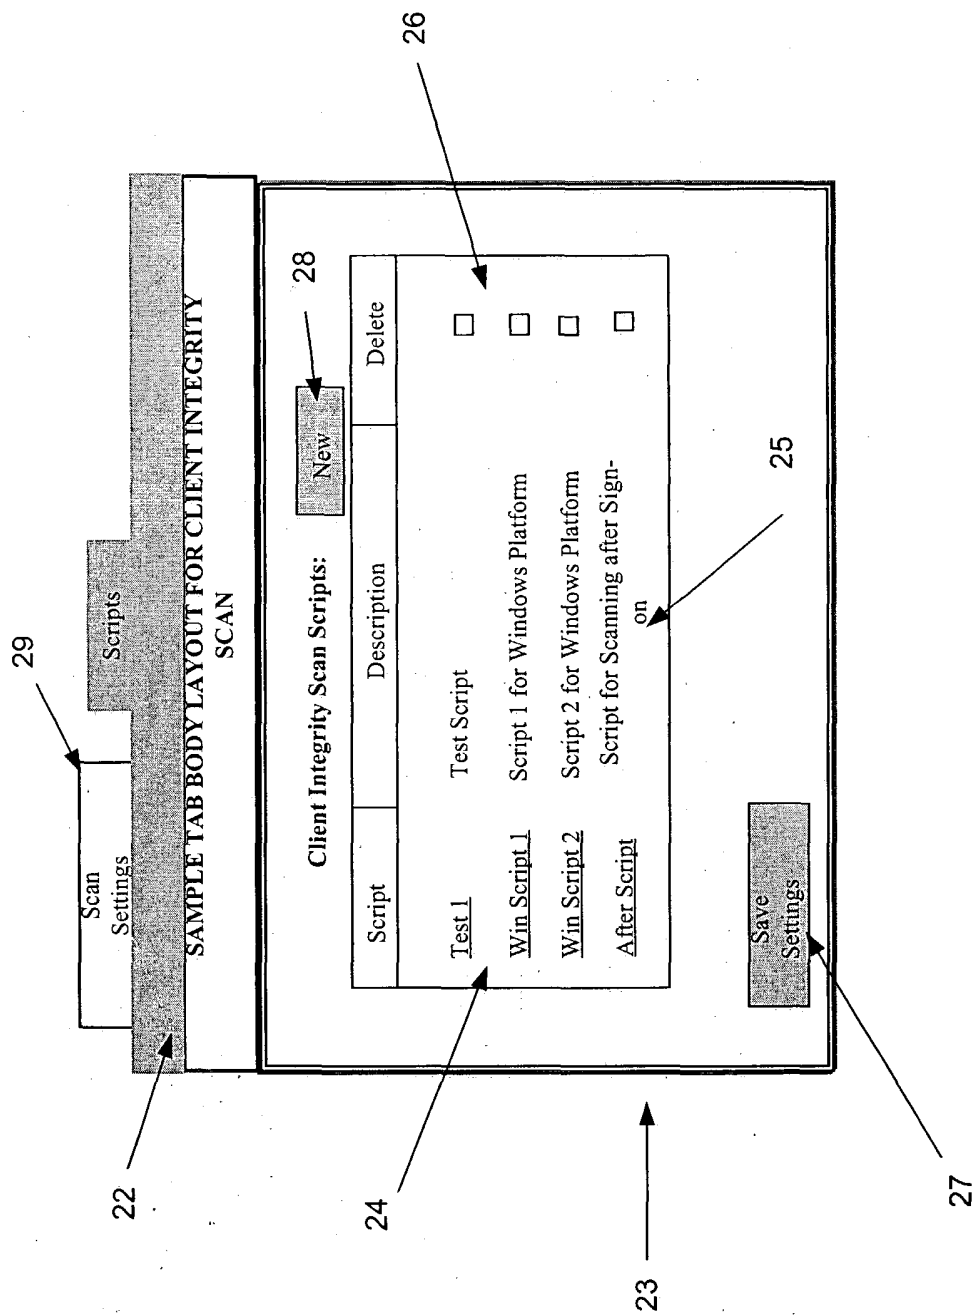


Fig. 5

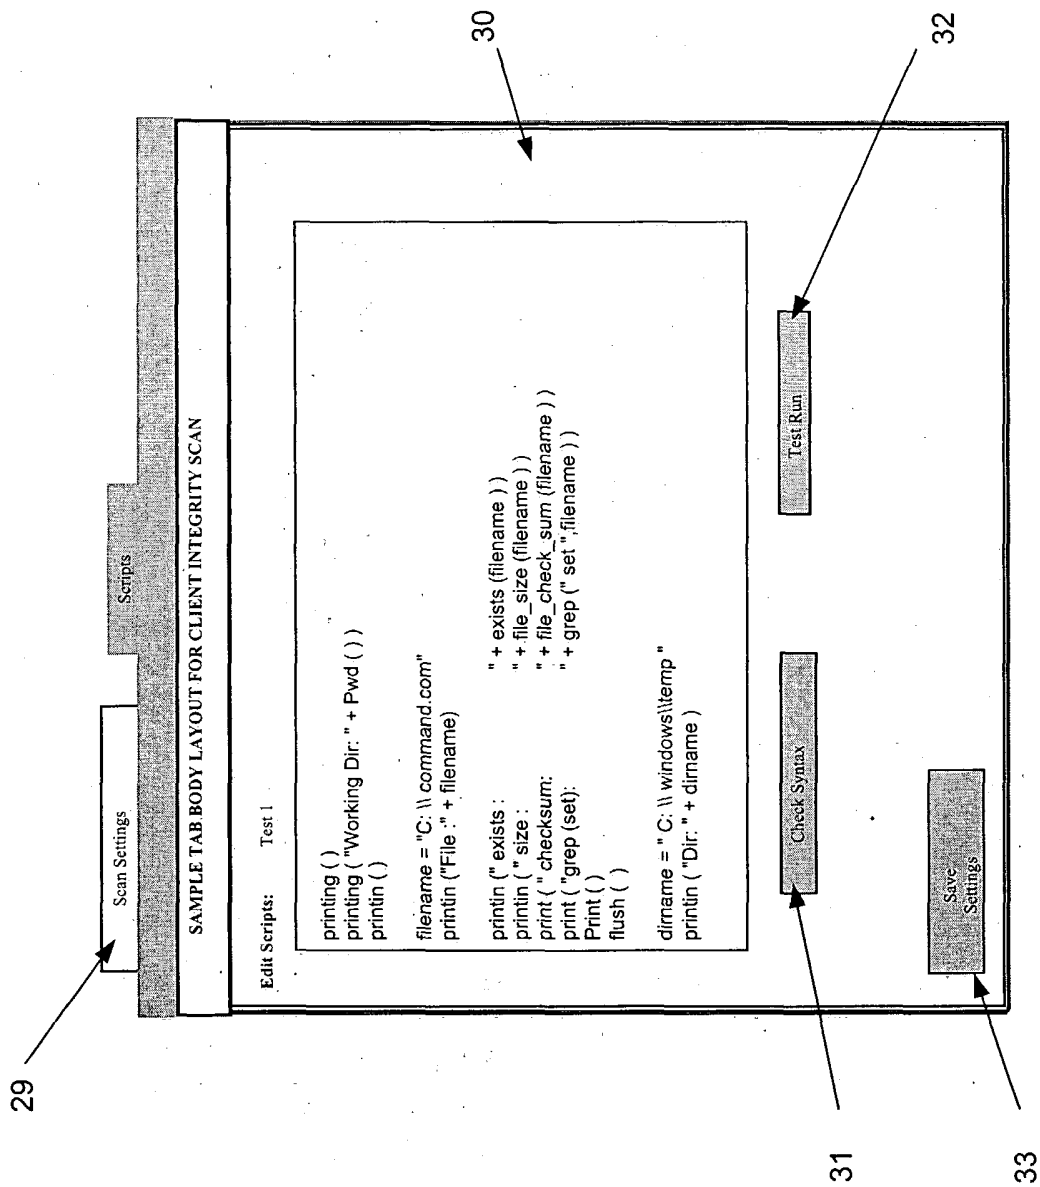


Fig. 6

Client
• • Integrity
▲▲
Check Syntax
Script /cis/test.pnut:
ok

34

Fig. 7

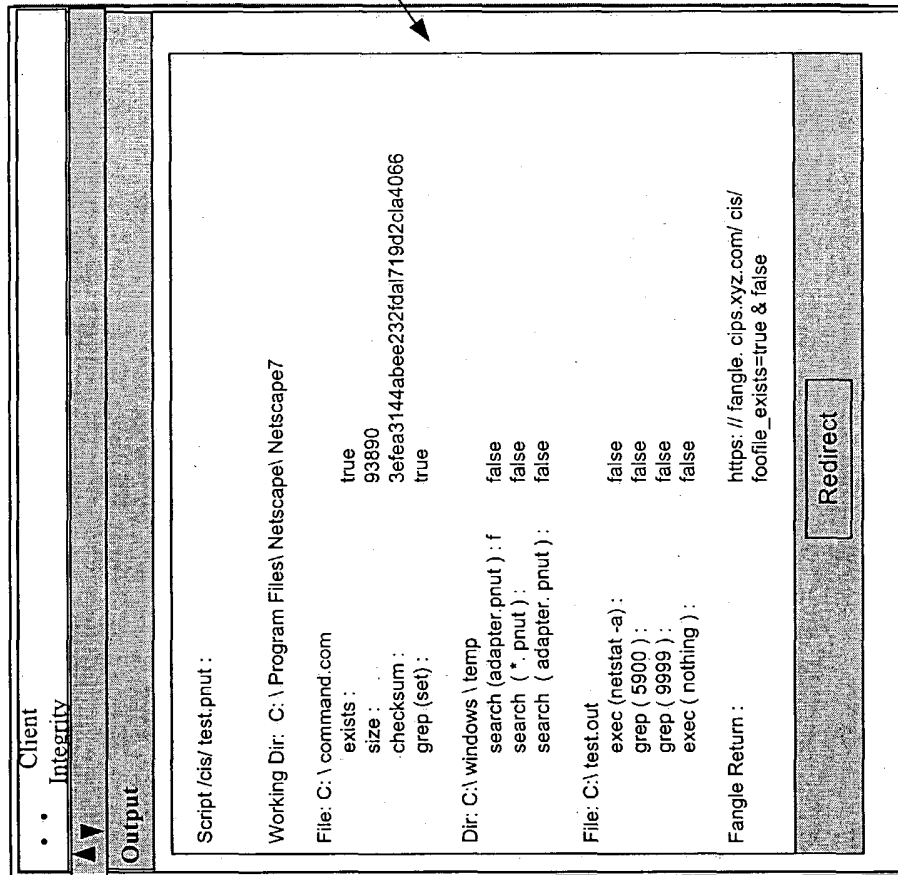


Fig. 8



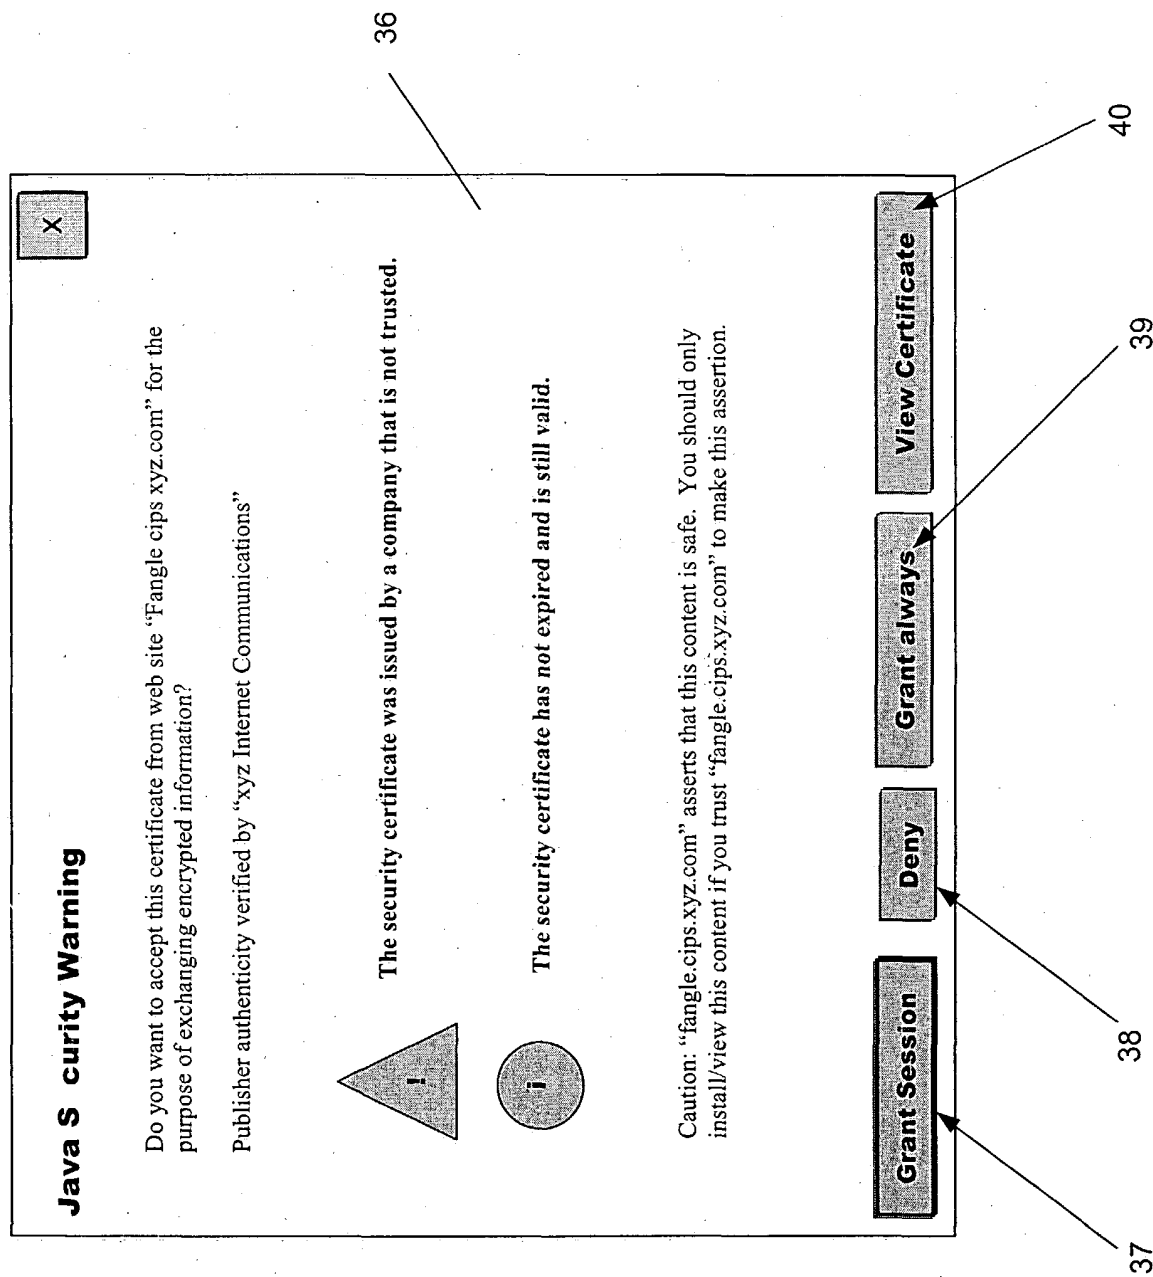


Fig. 9